



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 026 637 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
09.08.2000 Bulletin 2000/32

(51) Int. Cl.⁷: G06T 15/00

(21) Application number: 00300712.7

(22) Date of filing: 31.01.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Wasserman, Richard M
Redmond, WA 98052 (US)

(74) Representative:
Skone James, Robert Edmund
GILL JENNINGS & EVERY
Broadgate House
7 Eldon Street
London EC2M 7LH (GB)

(30) Priority: 03.02.1999 US 243689

(71) Applicant: Mitutoyo Corporation
Kawasaki, Kanagawa 213 (JP)

(54) Hardware simulation systems and methods for vision inspection systems

(57) The systems and methods of this invention provide simulated images to vision inspection systems. The simulated images emulate the vision of a vision inspection system. Graphical models of objects in a vir-

tual world and lens effects models are used to provide the simulated images.

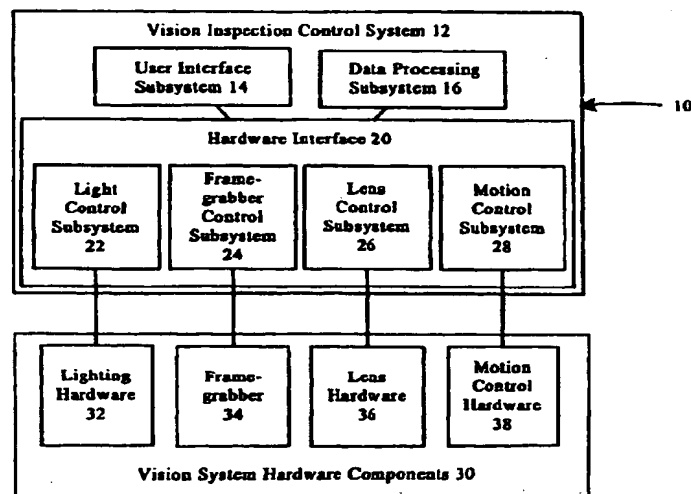


Fig. 1

EP 1 026 637 A2

Description

[0001] This invention is directed to methods and systems that simulate images produced by a vision system. More particularly, this invention is directed to methods and systems that generate a synthetic image that accurately approximates an image produced by an automated vision inspection system.

[0002] A wide variety of non-contact computer-vision-based systems exist that recognize or measure key features of parts or materials in a manufacturing environment. Many of these systems have a "training" or "programming" mode. In the programming mode, the system receives instructions regarding how to recognize or measure a part. This programming mode results in a set of instructions that are automatically repeated by the system. These instructions may be organized as a program in a general purpose scripting language or as a macro sequence. Stored program instruction sequences in either scripting or macro languages are known as part programs. The sequence of learning or training a part program is known as part programming.

[0003] Off-line programming software tools are popular for traditional, non-image-based coordinate measuring machines and robots. Off-line programming tools assist a programmer in selecting machine instructions to include in a program for the non-image-based coordinate measuring machines and robots. However, these off-line programming software tools do not account for problems experienced when forming optical images through physical lens systems because such concerns are not present in traditional, non-image-based coordinate measurement machines or robots. Therefore, these known off-line programming software tools are inadequate for any machine that includes a machine vision system and totally unsuitable for modern image-based inspection and/or motion systems.

[0004] The systems and methods of the invention use 3D graphical models of workpieces to simulate the images produced by the physical hardware of a vision inspection system. An exemplary embodiment of the system and method of this invention provides these synthetic images at a speed which approximates the real-time generation of images in a real vision inspection system. The simulation systems and methods of this invention produce synthetic video images that are comparable to the images that are captured by a camera looking through a lens at a workpiece in a vision inspection system.

[0005] The simulation systems and methods of this invention may be integrated with a user interface from machines which include a machine vision system, and especially with a user interface from a vision inspection system, to provide an off-line programming environment. The term "off-line programming" describes the creation of a part program without interfering with the ongoing operation of a physical vision inspection system.

[0006] The methods and systems of the invention separately provide vision simulation systems that allow vision system designers to develop software-only versions of vision inspection systems. Such software-only implementations will present the same user interface to operators as would be presented by a corresponding physical vision inspection station. Hardware emulation modules in the systems and methods of this invention simulate physical components of the visual inspection stations, such as cameras, lighting, lenses and motion control platforms. The simulation systems and methods of this invention generate synthetic images based on state models of the vision systems and computer-aided-design models of workpieces to be measured. The computer-aided-design models of workpieces may be provided by conventional commercial CAD packages, such as pro/ENGINEER from Parametric Technology Corporation, Waltham, MA 02453, and may coincide with the CAD data files which govern manufacturing of actual workpieces which would eventually be placed under the actual vision inspection station.

[0007] The synthetic images generated by the systems and methods of this invention may be used in place of the video captured by a camera in a hardware-based vision system. The systems and methods of this invention allow designers to readily develop an off-line version of an inspection system by replacing hardware-based software subsystems with subsystems that communicate with virtual components of a vision simulation engine. Operators are able to modify parameters in the virtual inspection system and immediately see the results as a change in the synthesized image. Because the inspection system simulation systems and methods of this invention are usable with existing vision inspection system user interfaces, a user may gain familiarity with the user interface prior to interacting with an actual physical vision inspection system.

[0008] The inspection system simulation systems and methods of this invention reduce system downtime due to creating new inspection part programs. The systems and methods of this invention are also able to improve operator training and to provide improved tools for off-site sales and marketing of vision inspection systems.

[0009] These and other features and advantages of this invention are described in or are apparent from the following detailed description of the exemplary embodiments.

[0010] The preferred embodiments of this invention will be described in detail, with reference to the following figures, wherein:

Fig. 1 is a block diagram of one exemplary embodiment of a hardware-based vision inspection system;

Fig. 2 is a block diagram of the exemplary embodiment of the vision inspection system using one exemplary embodiment of an inspection system

simulation system in accordance with this invention; Fig. 3 is a block diagram showing in greater detail one exemplary embodiment of a vision simulation engine in accordance with this invention; and Figs. 4A and 4B are a flowchart outlining one exemplary embodiment of a method for rendering synthesized images in accordance with this invention.

[0011] Fig. 1 is a block diagram of one exemplary embodiment of a physical vision inspection system 10. The vision inspection system 10 includes a vision inspection control system 12. The vision inspection control system 12 includes a user interface subsystem 14, a data processing subsystem 16 and a hardware interface 20. The hardware interface 20 includes a light control subsystem 22, a framegrabber subsystem 24, a lens control subsystem 26 and a motion control subsystem 28. The hardware interface 20 communicates with the vision system hardware components 30. In particular, the vision system hardware components 30 includes lighting hardware 32, framegrabber 34, lens hardware 36 and motion control hardware 38. The framegrabber 34 may include an internal or external framegrabber mechanism to produce still or real-time digital representations of a scene viewed by a monochrome or color camera. The camera and the framegrabber 34 combination described herein is intended to include both analog and digital camera configurations. For example, a digital camera may include an integral framegrabber.

[0012] Each of the physical hardware systems 32-38 of the vision system hardware components 30 represent one or more physical components of a typical machine vision inspection system. The systems and methods of this invention use graphical and physical modeling techniques to replace all of these components with a virtual model of the vision system hardware components 30.

[0013] One example of a commercially available vision inspection system which corresponds to the vision inspection system of Fig. 1, is the Quick Vision series of vision inspection machines available from Mitutoyo America Corporation Aurora, IL. One example of a commercially available vision inspection control system including a user interface subsystem which corresponds to vision inspection control system 12 and user interface subsystem 14 of Fig. 1, is the QVPak operating software for the Quick Vision series of vision inspection machines available from Mitutoyo America Corporation Aurora, IL.

[0014] Fig. 2 shows one exemplary embodiment of a vision simulation system 100 according to this invention, comprising a vision inspection control system 110 and one exemplary embodiment of a vision system hardware components simulation system 140 according to this invention. The vision inspection control system 110 is identical to the vision inspection control system 12 of Fig. 1 and includes a user interface subsystem 114, a data processing subsystem 116 and a hardware

interface 120. The hardware interface 120 includes a light control subsystem 122, a framegrabber subsystem 124, a lens control subsystem 126 and a motion control subsystem 128.

[0015] The vision system hardware components simulation system 140 is preferably implemented on a programmed general purpose computer. However, the vision system hardware components simulation system 140 can also be implemented on a special purpose computer, a programmed microprocessor or microcontroller and peripheral integrated circuit elements, an ASIC or other integrated circuit, a digital signal processor, a hardwired electronic or logic circuit such as a discrete element circuit, a programmable logic device such as a PLD, PLA, FPGA or PAL, or the like. In general, any device, capable of implementing a finite state machine that is in turn capable of implementing the flowcharts shown in Figs. 4A and 4B, can be used to implement the vision system hardware components simulation system 140.

[0016] The hardware interface 120 communicates with the vision system hardware components simulation system 140 over links 142 and 144. The vision system hardware components simulation system 140 includes a vision inspection system simulation processing subsystem 146 which communicates with a configuration subsystem 148, and an external view 150.

[0017] It should be appreciated that, if the vision system hardware components simulation system 140 is implemented in hardware or remotely from the vision inspection control system 110, the links 142 and 144 can be any now known or later developed device or system for connecting the vision inspection control system 110 to the vision system hardware components simulation system 140, including a direct cable connection, a connection over a wide area network or a local area network, a connection over an intranet, a connection over the Internet, or a connection over any other distributed processing network or system. In general, the links 142 and 144 can be any known or later developed connection system or structure usable to connect the vision inspection control system 110 to the vision system hardware components simulation system 140.

[0018] If the vision system hardware components simulation system 140 is implemented locally to the vision inspection control system 110, such as by a software application program, the links 142 and 144 are software structures that route data and control signals between the vision inspection control system 110 and the vision system hardware components simulation system 140. The vision system hardware components simulation system 140 receives control data over the link 142 from the vision inspection system simulation system 110 and sends synthetic image data over the link 144 to the vision inspection control system 110.

[0019] The configuration subsystem 148 stores models of a virtual world and includes a systems lighting model, a motion control model, a workpiece model,

and lens and camera configuration data that are used by the processing subsystem 146 to produce still and/or real-time synthetic images.

[0020] As shown in Fig. 2, the vision system hardware components simulation system 140 is integrated with the vision inspection control system 110, which is intended to drive the physical vision system hardware components 30. The vision system hardware components simulation system 140 is a hardware- or software-based emulation system that replaces the physical cameras, lenses, lights, stages, etc. of the physical vision system hardware components 30 shown in Fig. 1.

[0021] The vision system hardware components simulation system 140 is capable of producing images of a simulated vision inspection target at differing heights relative to a virtual optical system and camera. These synthetic images, which may include out-of-focus images and lighting effects, facilitate rapid and intuitive off-line programming.

[0022] The vision system hardware components simulation system 140 can also produce a three-dimensional external view 150 of the entire simulated vision inspection system. The external view approximates what is seen by the user when physically viewing a physical vision inspection system. Such an external view provides many important spatial cues to a system operator to further facilitate rapid and intuitive off-line programming.

[0023] A user of the systems and methods of this invention can import and fix computer-aided design (CAD) models of workpieces onto a virtual stage of the vision system hardware components simulation system 140 by importing and storing CAD models in the configuration subsystem 148. Real-time, synthetic digital images of the stage and the workpiece are then created and provided to the vision inspection control system 110 by the vision system hardware components simulation system 140. Users may then inspect the simulated workpieces on the virtual vision inspection machine simulated by the vision system hardware components simulation system 140 to select instructions for part programs that will run on the physical vision inspection system that is being simulated by the vision system hardware components simulation system 140.

[0024] The processing subsystem 146 creates synthetic images by taking at least one of the following factors into account: camera position and view; light source positioning; orientation of the workpiece relative to the stage; current position and orientation of the stage relative to the camera; lens subsystem parameters, such as focal length; the geometry of the modeled lens system; the optical effects produced by the lens and lighting systems; the optical properties of the workpiece; and the physical properties of the workpiece.

[0025] Fig. 3 shows another exemplary embodiment of the vision system hardware components simulation system 140 of the vision simulation system 100 in accordance with the invention. As shown in Fig. 3, in

this exemplary embodiment, the vision system hardware components simulation system 140 includes an input/output interface 200 and a rendering engine 202. The interface 200 includes subsystems that store the position of the virtual stage, the parameters for the virtual lens system and the parameters for the lighting system. The parameters of the virtual lighting system include the magnitude, the color, the orientation and the type of each virtual light source in the system. The parameters of the virtual lens system include magnification, field of view, focal length and depth of field of the simulated lens system.

[0026] The vision system hardware components simulation system 140 also includes a lighting model 206 which models light emanating from each virtual lighting source. The lighting model 206 describes the light from each virtual lighting source and includes information regarding position, orientation, magnitude, color and type of light from each light source.

[0027] The vision system hardware components simulation system 140 also includes a virtual world model 208, a static environment model 210, a virtual stage model 212 and a component model 214. The models 208-214 record and update the geometrical and physical model descriptions of a virtual stage and virtual workpieces. Each component is described in the corresponding model 208-218 in a scene hierarchy consistent with current graphical surface modeling techniques. Each model is a set of polygons connected at a collection of common nodes. Each node contains information such as position, color, material information, and texture coordinates. Each object may include one or more texture maps to be applied to the surface faces.

[0028] The virtual world model 208 stores a complete current 3D model of the virtual stage table, the virtual movable stage components and all of the virtual workpieces on the virtual stage. This virtual world model 208 is constructed from a hierarchy of components that include the static environment model 210, the virtual stage model 212 and the component model 214, including the position and orientation of the workpiece on the stage. When the virtual stage moves relative to the virtual stage table, the workpieces on the stage translate in a global coordinate system accordingly.

[0029] The vision system hardware components simulation system 140 also includes a lens system model 216 which stores virtual lens system data, such as field of view and perspective. The lens system model 216 transmits lens system data to the rendering engine 202.

[0030] The foregoing description assumes a typical case for many machine vision systems, where the camera is fixed in a global coordinate system, and the workpieces are moved relative to the camera by means of a moving stage component, for example an X-Y table, a conveyor belt, or the like. In other cases, where the camera and optical system are mounted in a gantry configuration, or on the end of a robotic arm, the camera

and optical system move relative to the global coordinate system, and the workpiece remains fixed relative to the global coordinate system. In the later case, the lighting model 206 should include the lighting position and orientation relative to the workpiece and the lens system, and the lens system model 216 should include the lens system position and orientation relative to the workpiece(s), stage, static model and world model. In the later case, the stage model 212 has no moving features, and may be included in the static model. In any case, the crucial data for image simulation is the relative position and orientation of the optical system, the workpiece(s) and the lighting system, and one skilled in the art can allocate relative position data for these elements to the appropriate models according to any of the well-established methods for relating objects in a set of local and global coordinate systems.

[0031] The vision system hardware components simulation system 140 also includes a memory 218 which stores the two-dimensional image.

[0032] The vision system hardware components simulation system 140 also includes a rendering engine 202. Examples of such a rendering engine is OpenGL or Direct3D. OpenGL is an open standard for 3D graphical rendering which is described in OpenGL Reference Manual, OpenGL Architecture Review Board, Addison-Wesley Developers Press, Reading, MA, 1996. Direct3D is a component of the DirectX system of tools distributed by Microsoft Corporation in conjunction with their Windows™ operating system. The rendering engine 202 accepts as input the 3D polygonal model stored in the virtual world model 208, the lens model 216 and the lighting model 206. The rendering engine 202 may be any system which produces a two-dimensional image and a depth map given a three-dimensional model, using Gouraud shading, raytracing, etc. The rendering engine 202 receives the 3D polygonal model and lighting data from the lighting model 206 and the virtual world model 208, respectively.

[0033] The rendering engine 202 creates two-dimensional image data as viewed through an ideal pin-hole lens system. The 2D image data includes a two-dimensional mapping which stores the distance of each pixel in the image map from the virtual camera. The rendering engine 202 also generates the three-dimensional external view 150 of the virtual world (shown in Fig. 2). As described above, the three-dimensional external view 150 emulates a view of the system as would be seen by an operator of the vision inspection system.

[0034] The two-dimensional camera image data does not simulate real world camera information. The two-dimensional camera image data has an infinite depth of focus as if it were created using a perfect pin-hole camera. This does not accurately simulate the view of real machine vision inspection systems, which often have very small depths of field. Therefore, the vision system hardware components simulation system 140 also includes a lens effects processing engine 204. The

lens effect processing engine 204 receives the two-dimensional camera image data including the depth per pixel data from the rendering engine 202. The lens effects processing engine 204 modifies the camera image in accordance with the virtual lens parameters. The lens effects processing engine 204 outputs a two-dimensional image. This two-dimensional image takes into account the virtual optical geometry of the system. One example of a lens effects processing engine is described in A Lens and Aperture Camera Model for Synthetic Image Generation, Computer Graphics, vol. 15, no. 3, pp. 297-305, August 1981.

[0035] It should be understood that the lens effects engine 204 and the rendering engine 202 may form portions of a single processor or may be separate processors. Moreover, the rendering engine 202 and the lens effects engine 204 can be combined into a single rendering and lens effects engine. Such a combined rendering and lens effects engine could be used, for example, with ray tracing rendering to follow each ray through the optical system.

[0036] It should be understood that each of the models shown in Fig. 3 can be implemented as portions of a suitably programmed general purpose computer. Alternatively, each of the models shown in Fig. 3 can be implemented as physically distinct hardware circuits within an ASIC, or using FPGA, a PLD, a PLA or a PAL, or using discrete logic elements or discrete circuit elements. The particular form each of the models shown in Fig. 3 will take is a design choice and will be obvious and predicable to those skilled in the art.

[0037] Figs. 4A and 4B are a flowchart outlining one exemplary embodiment of a method for rendering a vision simulation of a vision inspection system in accordance with this invention. As shown in Fig. 4A, the control routine starts at step S100 and continues to step S102. In step S102, components of the virtual world, such as a table, camera, lighting, etc. are initialized. Then, in step S104, the models of the workpieces are added to the virtual world. Next, in step S106, a stage position is determined. Control then continues to step S108.

[0038] In step S108, the positions of the virtual stage and of all workpieces on the virtual stage are updated. Next, in step S110, the virtual world model is updated based on other system parameters, such as lighting, lenses, etc. Then, in step S112, the virtual world is rendered to form a two-dimensional camera image and a corresponding map of pixel depth data. Control then continues to step S114, which is shown in Fig. 4B. Then, in step S114, a determination is made whether lens effects are required. If lens effects are required, control continues to step S116. Alternatively, if lens effects are not required, control jumps directly to step S118. In step S116, virtual lens effects are applied to the simulated image. Next, in step S118, the virtual camera view is provided to a vision inspection control system. Control then continues to step S120.

[0039] In step S120, a determination is made whether a virtual external view is required. If a virtual external view is required, control continues to step S122. If a virtual external view is not required, control jumps directly to step S124. In step S122, the virtual external view of the system is rendered. Then, in step S124, a determination is made whether the vision simulation engine should be halted. If the vision simulation engine is to be halted, control continues to step S126. If the vision simulation system is not to be halted, control jumps back to step S106. In step S126, the vision simulation engine is stopped.

[0040] It should be appreciated that steps S112-S116 can be combined into a single step that both renders the image and simultaneously adds any lens effects to the image. For example, in a ray tracing system, as each ray is used to render a portion of the image, the path of that ray is followed through the optical system to account for any lens effects.

[0041] It should be further appreciated that the flowchart outlined in Figs. 4A and 4B is one exemplary embodiment of a more-general method for rendering a simulated image from a machine vision system. The machine vision system can be a vision inspection system or a vision system attached to some other machine, such as a robot. This method for rendering the simulated image includes generating a simulated image of a virtual world based upon a first model that characterizes or represents at least one object in the virtual world and a second model that characterizes or represents an optical system, and providing the simulated image to a machine vision control system. The machine vision control system can be an inspection program generation system, such as a system for generating a part program for the vision inspection system described above, or a motion command generation system, such as a system for generating motion commands for a robot having a machine vision system.

[0042] Operators are able to modify parameters in the machine vision system and immediately see the results as a change in the synthesized or simulated image. Because the machine vision simulation systems and methods of this invention are usable with existing machine vision system user interfaces, such as vision inspection system user interfaces, a user may gain familiarity with the machine vision user interface prior to interacting with an actual physical vision inspection system.

[0043] While this invention has been described with the specific embodiments outlined above, many alternatives, modifications and variations are apparent to those skilled in the art. Accordingly, the preferred embodiments described above are illustrative and not limiting. Various changes may be made without departing from the spirit and scope of the invention.

Claims

1. A vision system hardware component simulation system for machine vision, comprising:

a first model representing at least one object;
a second model representing an optical system; and
a processor that generates an image of a virtual world containing the at least one object based upon the first model and the second model.

2. The vision system hardware component simulation system of claim 1, wherein:

at least one of the first and second models includes information which characterizes the relative orientation and position of the corresponding at least one object and the optical system;

the image of the virtual world comprising an image of the at least one object as seen through the represented optical system.

3. The system of claim 1 or claim 2, further comprising at least one additional model representing at least one of a stage, a workpiece fixture and a lighting system, wherein the processor further generates the image of the virtual world based on the at least one additional model.

4. The system of any of the preceding claims, further comprising a control instruction generation system.

5. The system of any of the preceding claims, wherein the second model characterizes at least one of an aperture of a lens system, a focal length of the lens system, an image magnification of the lens system, an optical system geometry of the lens system, and an image capture system.

6. The system of any of the preceding claims, further comprising a user interface for a machine vision inspection system to simulate, the user interface simulating at least one operation of the machine vision inspection system independent of at least one component of the machine vision inspection system.

7. A method for simulating images based on the characteristics of at least one machine vision hardware component, comprising:

generating at least a simulated machine vision image of a virtual world containing at least one object based upon at least a first model that characterizes the at least one object and a sec-

ond model that characterizes an optical system; and

providing the simulated image to a machine vision control system program.

5

8. The method of claim 7, wherein generating the simulated image based on the first and second models further comprises processing lighting system parameters, the lighting system parameters including at least one of a position and an orientation relative to the at least one object, a magnitude, a color and a type of at least one lighting source.

10

9. The method of claim 7 or claim 8, further comprising:

15

determining if an external view of the virtual world is to be rendered; and

if the external view is to be rendered, providing the external view to the machine vision control system program.

20

10. A method for facilitating the generation of at least one machine control instruction for a machine having a machine vision system independently of at least one element of the machine vision system, the method comprising:

25

rendering a synthetic image of at least one object to simulate the view through the machine vision system according to a representation of at least one component of the machine vision system; and selecting a machine control instruction based at least in part on the synthetic image.

30

35

40

45

50

55

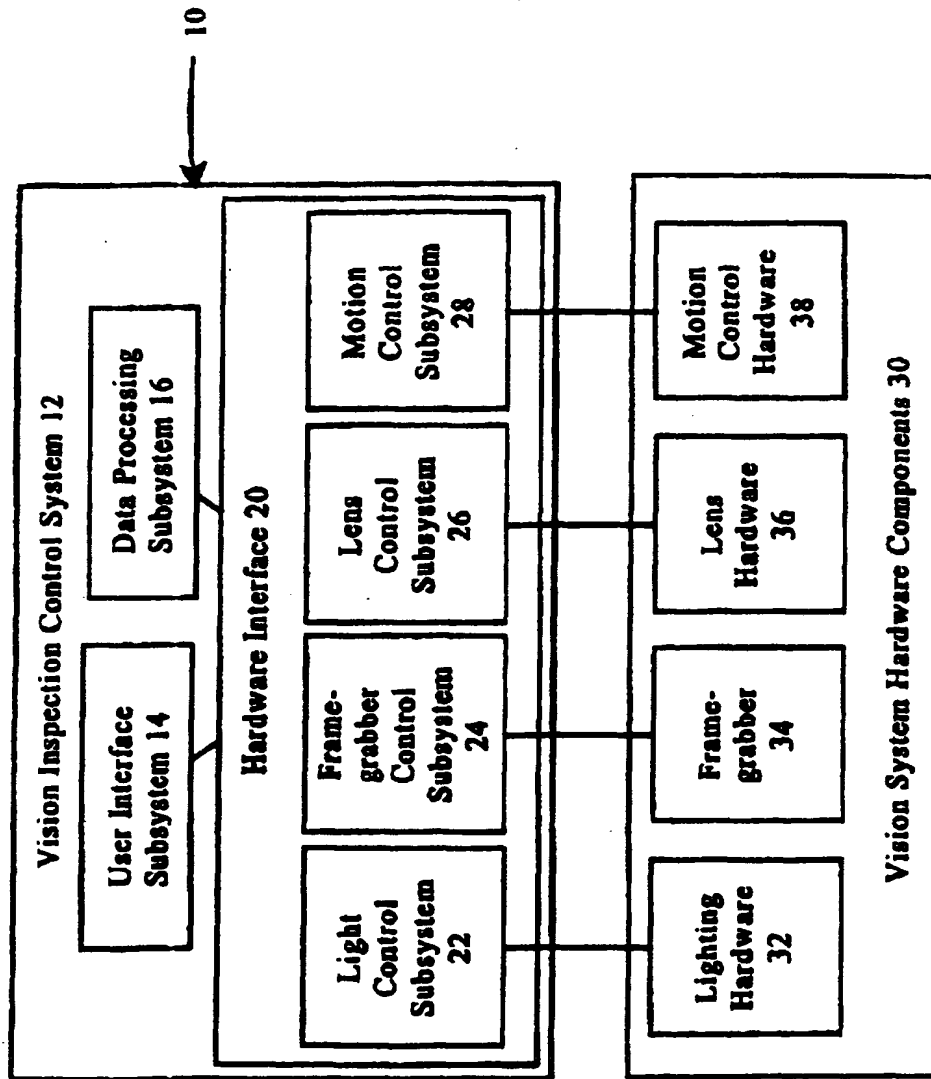


Fig. 1

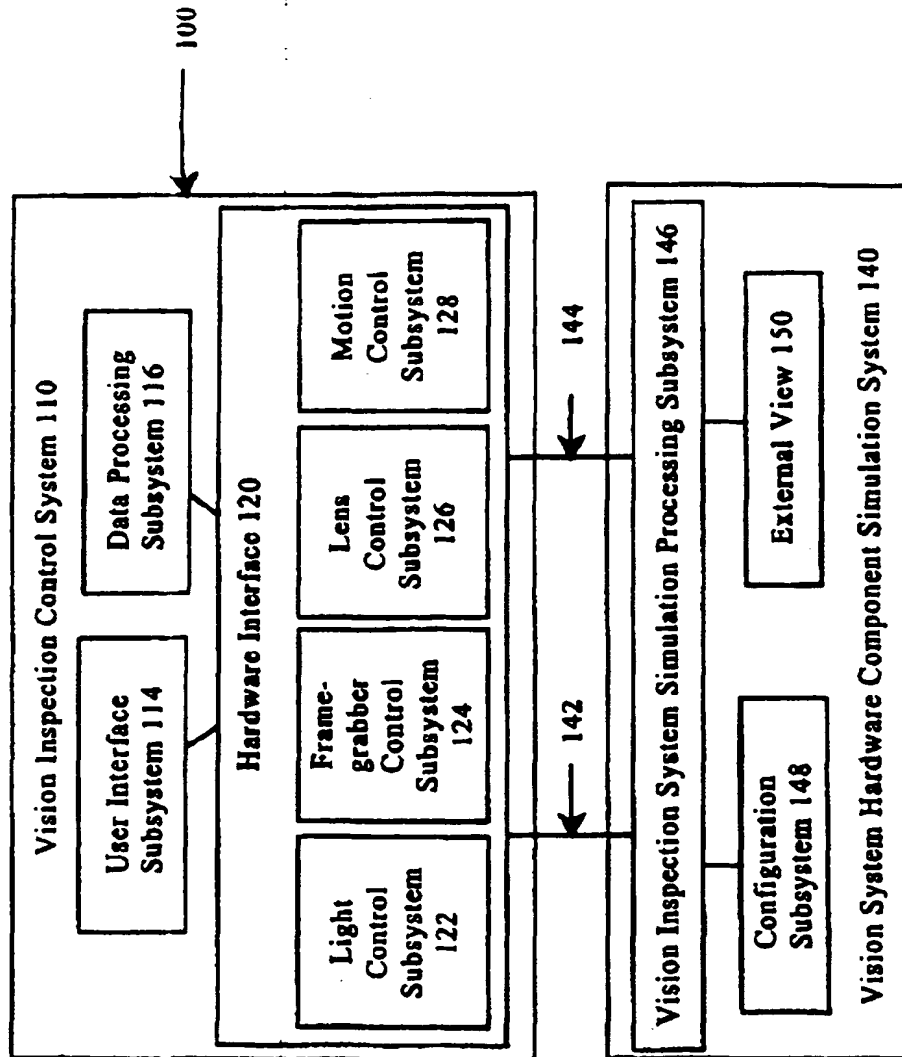


Fig. 2

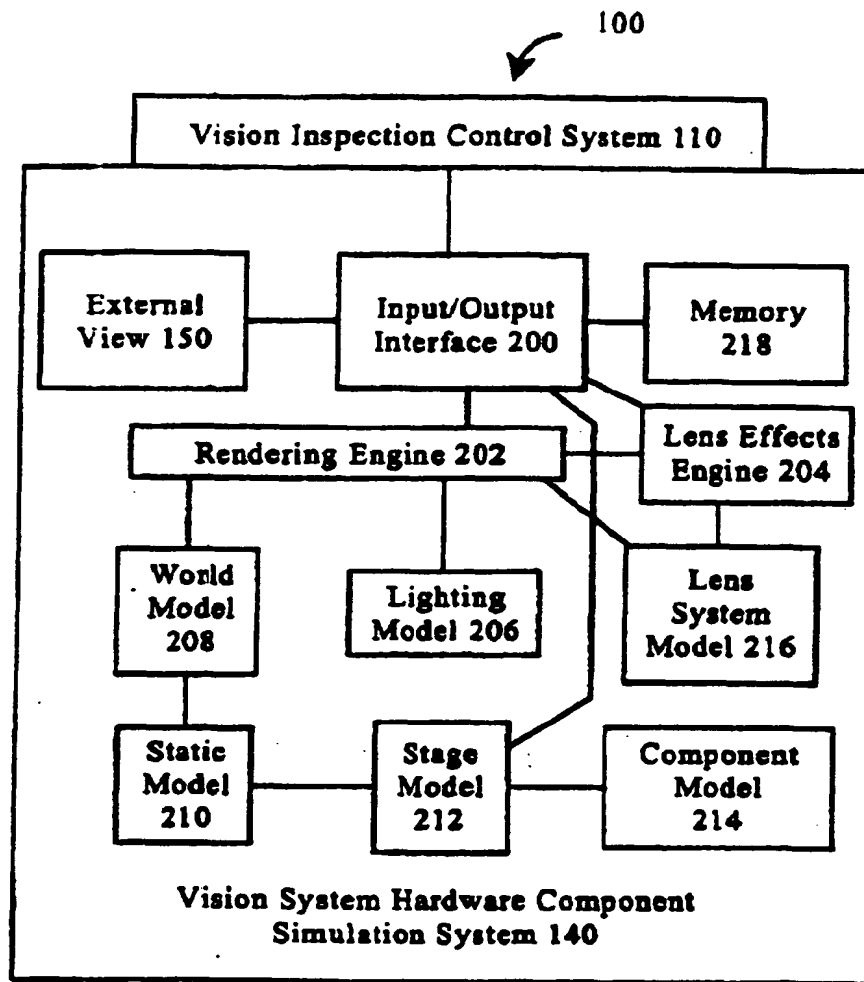


Fig. 3

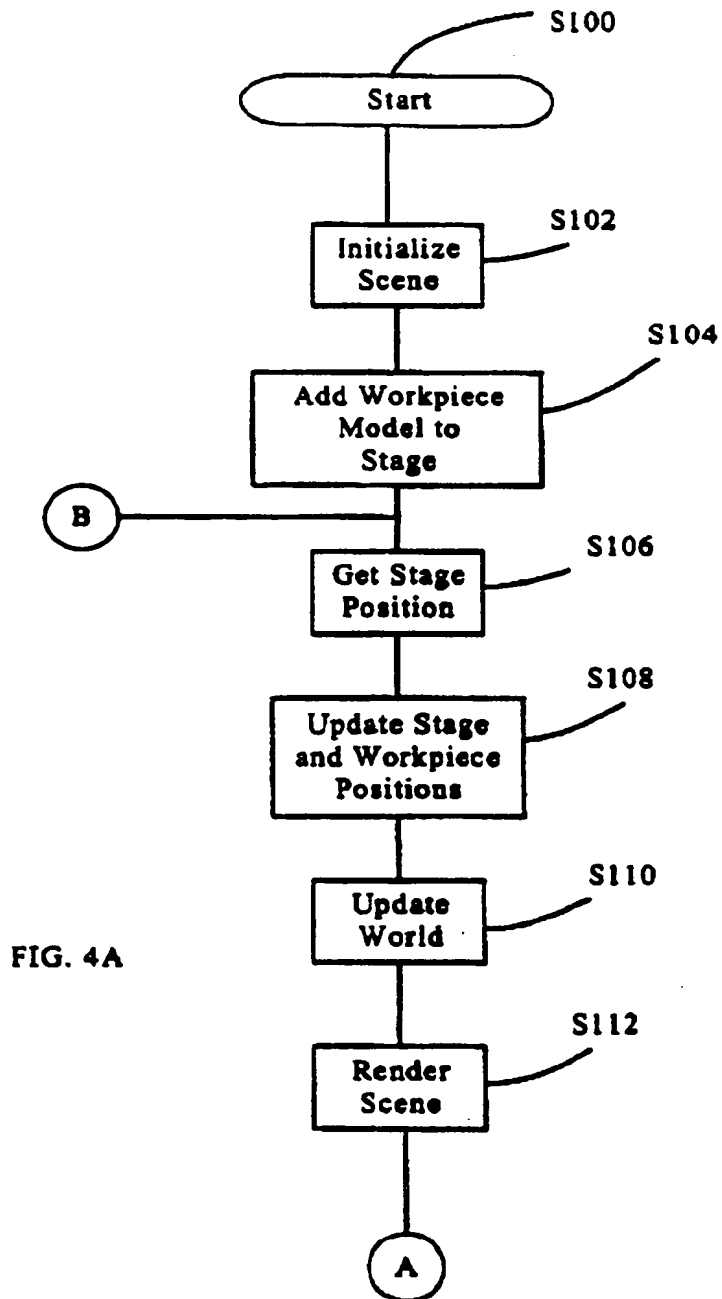


FIG. 4A


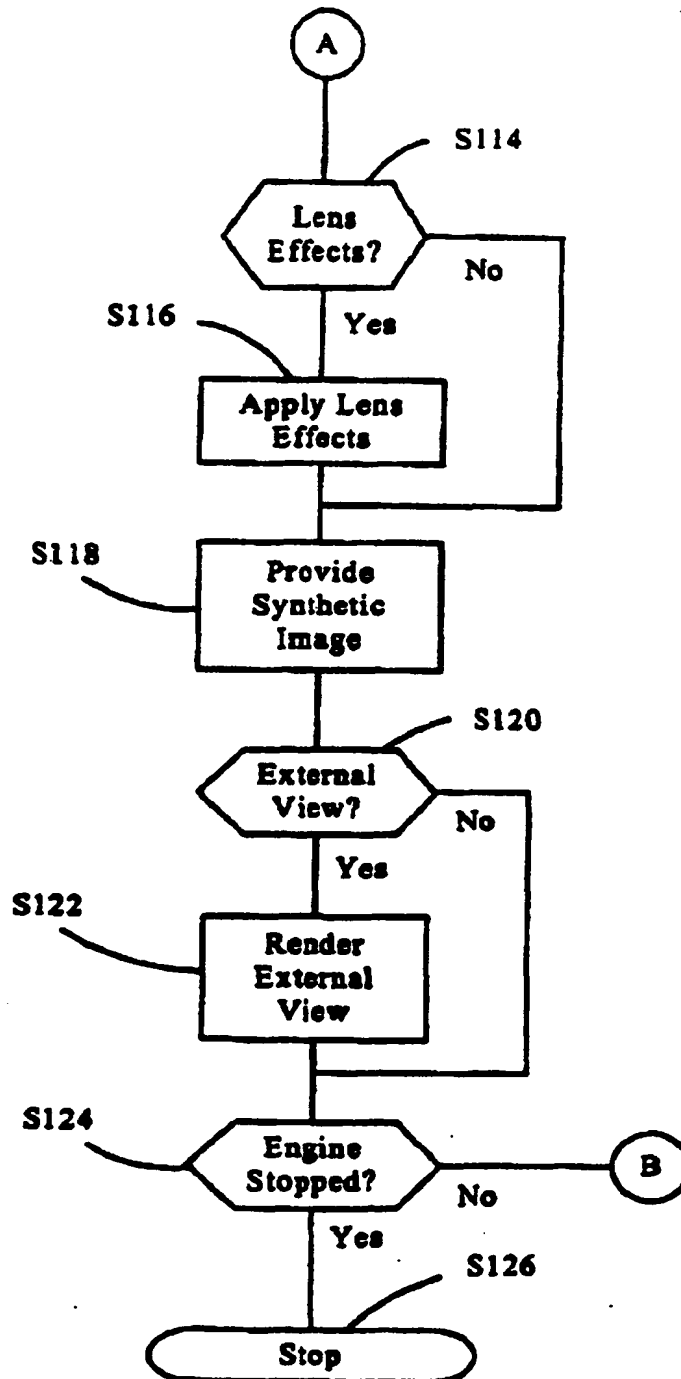


FIG. 4B



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 026 637 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
29.08.2001 Bulletin 2001/35

(51) Int Cl.7: **G06T 15/00**

(43) Date of publication A2:
09.08.2000 Bulletin 2000/32

(21) Application number: **00300712.7**

(22) Date of filing: **31.01.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Wasserman, Richard M**
Redmond, WA 98052 (US)

(74) Representative: **Skone James, Robert Edmund**
GILL JENNINGS & EVERY
Broadgate House
7 Eldon Street
London EC2M 7LH (GB)

(30) Priority: **03.02.1999 US 243689**

(71) Applicant: **Mitutoyo Corporation**
Kawasaki, Kanagawa 213 (JP)

(54) **Hardware simulation systems and methods for vision inspection systems**

(57) The systems and methods of this invention provide simulated images to vision inspection systems. The simulated images emulate the vision of a vision inspection

system. Graphical models of objects in a virtual world and lens effects models are used to provide the simulated images.

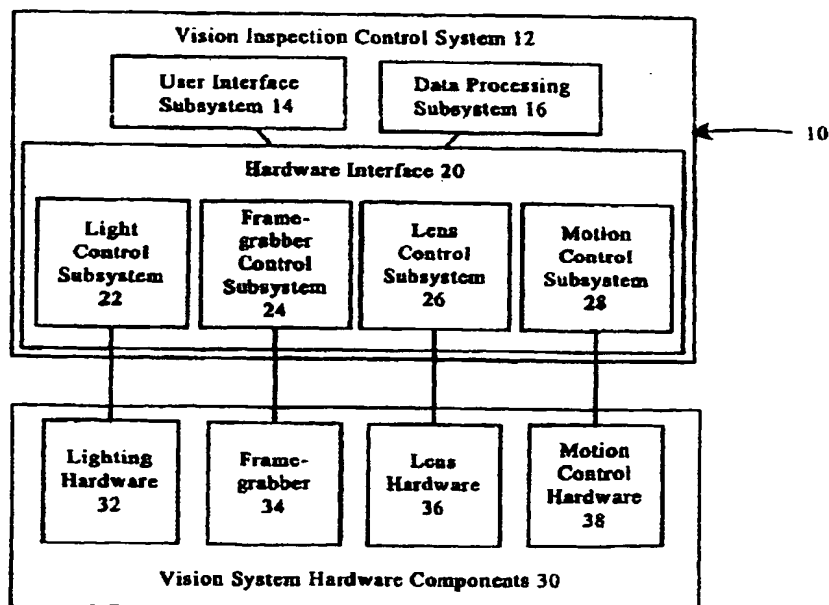


Fig. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 0712

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|---|--|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
| X | WO 98 45814 A (SYNAPIX INC) 15 October 1998 (1998-10-15) * abstract * * page 3, line 12 - line 13 * * page 17, line 9 - line 12 * * claims 10-12 * --- | 1-10 | G06T15/00 |
| X | WO 99 01846 A (MENTAL IMAGES GMBH & CO KG) 14 January 1999 (1999-01-14) * abstract * * page 9, line 15 - page 10, line 4 * --- | 1-10 | |
| X | POTMESIL M ET AL: "A LENS AND APERTURE CAMERA MODEL FOR SYNTHETIC IMAGE GENERATION" COMPUTER GRAPHICS, US, NEW YORK, NY, vol. 15, no. 3, August 1981 (1981-08), pages 297-305, XP000910924 ISSN: 0097-8930 * abstract * * page 298, column 1, line 14 - line 21 * * page 301, column 1, line 36 - line 44 * --- | 1-10 | |
| X | KOLB C ET AL: "A REALISTIC CAMERA MODEL FOR COMPUTER GRAPHICS" COMPUTER GRAPHICS PROCEEDINGS (SIGGRAPH), US, NEW YORK, IEEE, 6 August 1995 (1995-08-06), pages 317-324, XP000546243 ISBN: 0-89791-701-4 * abstract * * page 323, column 1, line 13 - line 20 * ----- | 1 | |
| The present search report has been drawn up for all claims | | | |
| Place of search BERLIN | | Date of completion of the search 6 July 2001 | Examiner González Arias, P |
| CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document | | T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons ----- &: member of the same patent family, corresponding document | |

EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 0712

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-07-2001

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| WO 9845814 A | 15-10-1998 | US 6160907 A | 12-12-2000 |
| | | AU 6791298 A | 30-10-1998 |
| | | AU 6874898 A | 30-10-1998 |
| | | AU 6876298 A | 30-10-1998 |
| | | AU 6944098 A | 30-10-1998 |
| | | EP 0974122 A | 26-01-2000 |
| | | EP 0974123 A | 26-01-2000 |
| | | EP 0974124 A | 26-01-2000 |
| | | EP 0974126 A | 26-01-2000 |
| | | WO 9845816 A | 15-10-1998 |
| | | WO 9845812 A | 15-10-1998 |
| | | WO 9845813 A | 15-10-1998 |
| | | US 6124864 A | 26-09-2000 |
| | | US 6084590 A | 04-07-2000 |
| WO 9901846 A | 14-01-1999 | AU 8123798 A | 25-01-1999 |
| | | EP 0993659 A | 19-04-2000 |

EPO FORM P449

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82